

2" SIGN POST INSTALLATION METHOD Nº I (IO 1/2 Post)

Artificial Stone Sidewalk-Excavation Unlimited



posts shall be installed by drilling a hole in the sidewalk, only after sidewalk has been installed.

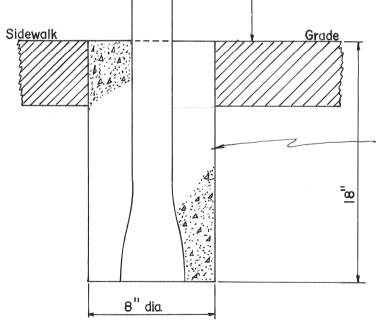

Concrete Base shall consist of:

- a) I part high early strength cement
- b.) I $\frac{1}{2}$ parts clean, sharp sand
- c.) 3 parts course aggregate
- d) clean water to form workable mixture

NOTES:

- I Sign posts to be Black Steel Pipe, 2" internal diameter, 10 $\frac{1}{2}$ long. 2. The bottom of each post shall be deformed to provide
- for anti-rotation.
- 3. All sign posts to be 20" o.c. from the face of curb, except when directed by the Boston Transportation Dept.
- 4. Signs shall set at an angle of 60° with the curb line and facing the flow of traffic, except when directed by the Boston Transportation Dept
- 5. Sign posts to be painted with 2 coats of Black Enamel paint.

A200